

上海汉钟精机股份有限公司(枫泾厂),
上海市金山区枫泾镇高枫公路8289号,
Shanghai Hanbell Precise Machinery CO.,Ltd.
Add: No.8289, Tingfeng Road, Fengjing Area, Jinshan District, Shanghai
Tel: 021-57350280
Fax: 021-31106889/57352004

上海汉钟精机股份有限公司(兴塔厂),
上海市金山区枫泾镇建贡路108号
Shanghai Hanbell Precise Machinery CO.,Ltd.
Add: No.108, Jiangong Road, Fengjing Area, Jinshan District, Shanghai
TEL: 021-57350280
FAX: 021-31106805

台湾汉钟精机股份有限公司(桃园厂)
桃园市观音区工业三路五号

Address: No.5, Gongyue Industrial Road, Gaoqian Industrial Zone, Taoyuan City,
TEL: 03 - 4836215, 04 - 23501886





股票代码: 7002158

www.hanbell.com.cn

品质典范 Quality Paradigm

节能环保, 高效, 安全
Energy saving | High efficiency | Safety


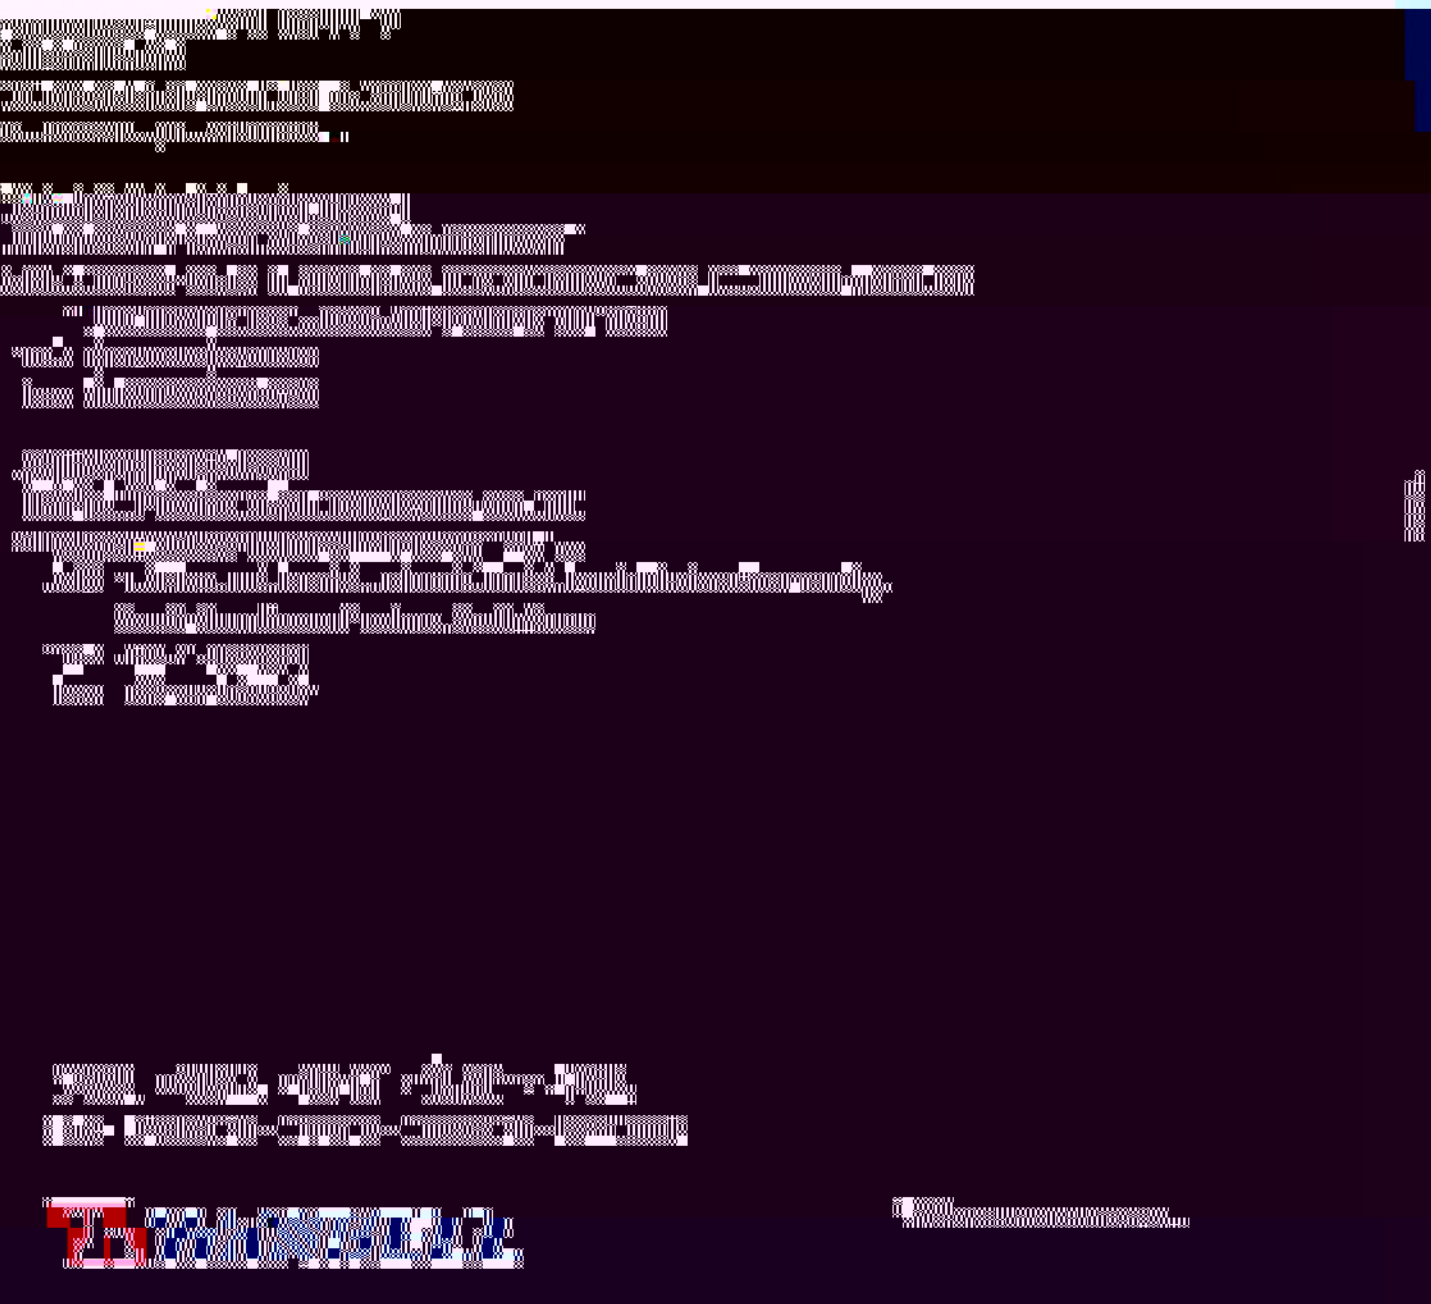
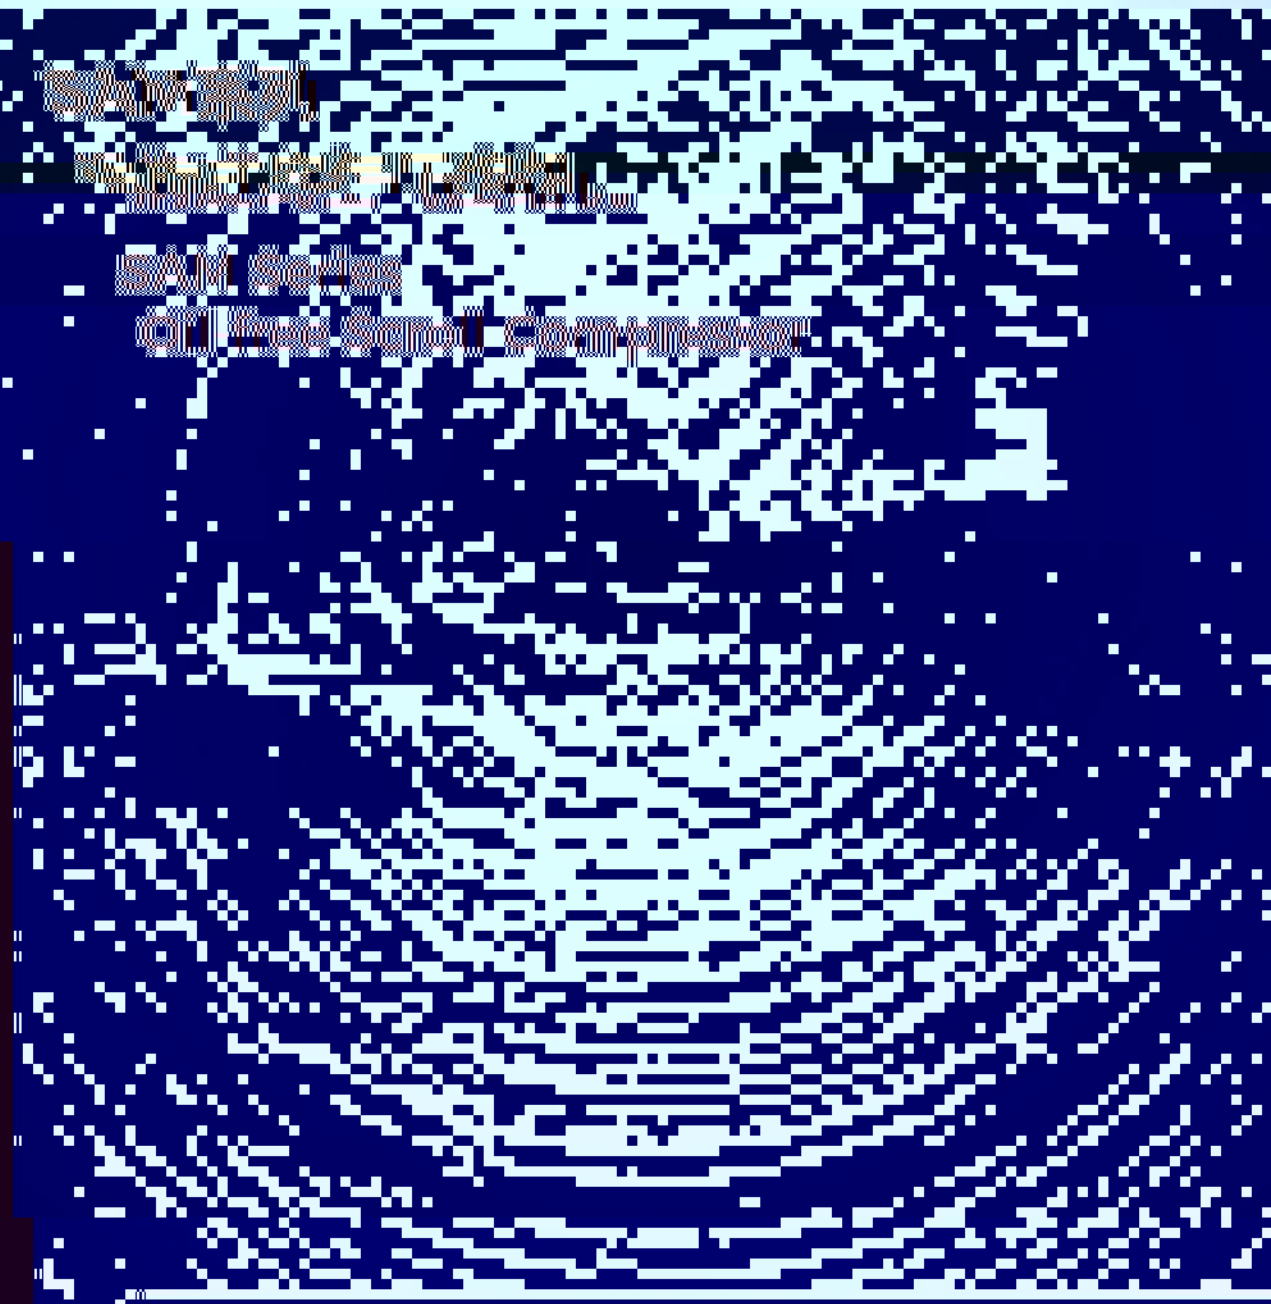


汉钟 HANBELL

“品质、环境、安全政策”

“Quality, Eco-friendly, Safety”

- 品质挂帅，物超所值
Excellent quality, reasonable price
- 顾客满意，安全高效
Customer satisfaction, Safety and efficiency
- 节能减排，生态环境
Energy-saving, eco-friendly
- 遵纪守法，不断改善
Observe law, keep improving

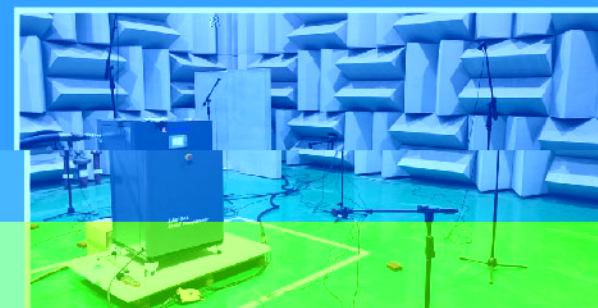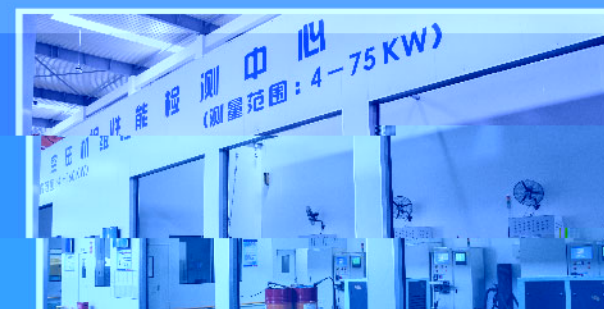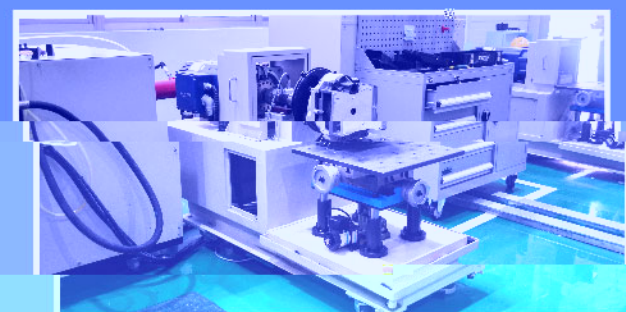

目录 CATALOG

- 01 汉钟精机简介
About Us
- 03 无油涡旋式压缩机原理
Working Principle
- 04 无油涡旋机组设计特点
Design Features
- 05 无油涡旋机组技术参数表
Technical Specifications
- 06 应用领域
Application
- 07 销售、服务网络
Sales And Service Network



汉钟压缩机人

汉钟压缩机人，我们共同成长。

汉钟拥有专业的设计研发人才，持续创新不断研发新的产品和技术，拥有自主的研发团队，以及从开发到客户使用（自相关控制等），具有多年经验的资深人员，使客户无后顾之忧。

历经多年淬炼，汉钟在本行业已具有一定的知名度，为成为世界知名厂家不断努力，深耕国内市场，并不断以自有品牌HANBELL开拓海外市场。

高精度设备、自动化仓储、AGV、完整测试实验室与有效率的物流管理，加上品质、环境安全管理系统的有效运行，保证了汉钟“品质挂帅、物超所值”的方针承诺。汉钟系列产品每年都以高成长率创造了令人钦佩的用户口碑，持续保持创新、高品质的经济总投入。一直汉钟将立足中国，放眼世界，不断提升优质的客户产品与服务，深耕流体机械行业。

资质/荣誉 qualification/honor



无油涡旋式压缩机原理 Working Principle



无油涡旋机组设计特点 Design Features



SAM系列无油涡旋机组技术参数表 Technical Specifications

型号 Model	电机功率 Motor Power (kW)	排气压力 Discharge Pressure (bar)	容积流量 Capacity FAD (L/min)	出口尺寸 Outlet size (inch)	噪音 Noise dB(A)	机组净重 Net weight (kg)	机组外形尺寸 Dimensions (L*W*H)mm
SAM-04A	3.7	8	355	G 1/2"	57	260	718*718*1080
SAM-06A	5.5	8	610	G 3/4" G 1/2"	65 58	250 300	730*650*1020 718*718*1080
SAM-08A	3.7*2	8	820	G 3/4"	65	450	1350*818*1100
SAM-11A	3.5*2	8	1220	G 1"	62	500	1350*818*1100
SAM-13A	3.7*4	8	1640	G 1"	67	600	1500*818*1800
		10	1420	G 1"	67	600	1500*818*1800
SAM-16A	5.5*3	8	1830	G 1"	66	600	1500*818*1400
SAM-22A	5.5*4	8	2440	G 1-1/4"	67	750	1500*818*1800

1、SAM-04/06A可选配内置不锈钢储气罐，容积：15L；

SAM-04/06A can be optionally equipped with a built-in stainless steel gas storage tank, with a capacity of 15L;

2、噪音值为满负载时，在无反声室中距机组正面1.5m处测得值。根据实际运行工况的不同，或受周围环境噪音以及实际设置状态的影响，所测数值将略有偏差。

the noise value is tested when the unit is at full load, and it is measured at a distance of 1.5m from the front of the unit in the anechoic room. The measured values may deviate slightly depending on the actual operating conditions, or due to the influence of ambient noise and actual setting status.

3、上述技术参数依据ISO1217，吸气温度：20℃；相对湿度：60%；吸气压力：0.1MPa。

The above technical parameters measured according to ISO1217, Air inlet temperature: 20℃; Relative humidity: 60%; Inlet pressure: 0.1MPa.

应用领域 Application



医疗器械（牙医、制氧等医疗气源）
Medical instruments (dental, oxygen and other medical sources)

电子工业（表壳清洁气源）
Electronics industry (assembly, cleaning, gas)

制药工业（制药业的搅拌）
Pharmaceutical industry (agitation of pharmaceutical industry)

食品工业（酿造业的搅拌）
Food industry (agitation of brewery industry)

纺织工业（喷气织机）
Textile industry (air-jet looms)

其他工业（各种工业气源）

Other industries (various industrial gas sources)

